

## PM9-AD608 Amplifier, 600W 8-channel PROMATRIX 9000



- Flexible power partitioning across all channels
- Low power consumption and heat loss
- Full supervision with integrated fail-safe redundancy
- Digital signal processing per channel
- IP-networked on OMNEO for audio and control

This is a flexible and compact multi-channel power amplifier for 100 V or 70 V loudspeaker systems in Public Address and Voice Alarm applications. It fits in centralized system topologies, but also supports decentralized system topologies because of its OMNEO IP-network connection, combined with DC-power from a multifunction power supply. The output power of each amplifier channel adapts to the connected loudspeaker load, only limited by the total power budget of the whole amplifier. This flexibility, and the integration of a spare amplifier channel, makes it possible to utilize the available power effectively and use less amplifiers for the same loudspeaker load, compared to using traditional amplifiers.

Digital sound processing and control, adjusted to the acoustics and requirements of each zone, allow for better sound quality and speech intelligibility.

### Functions

#### Efficient 8-channel power amplifier

- Transformerless, galvanically isolated, 70/100 V outputs for a maximum total load of 600 W.
- Flexible partitioning of the available output power across all amplifier channels to use it effectively, significantly reducing the amount of required amplifier power in a system.
- Cost and space saving, integrated, additional independent spare channel (maximum 600 W) for fail-safe redundancy.

- Class D amplifier channels with two-level power lines for high-efficiency in all operating conditions; dissipation and heat loss is minimized to save on energy and battery capacity for backup power.

#### Flexibility in loudspeaker topologies

- A/B outputs on every amplifier channel to support redundant loudspeaker wiring topologies. Both outputs are individually supervised and disabled in case of a fault.
- Class A loop wiring possible between the A and B loudspeaker outputs.
- Load independent frequency response; the amplifier channels can be used with any loudspeaker load up to the maximum, without any change in audio quality.

#### Sound quality

- Audio-over-IP, using OMNEO, the Dynacord high-quality digital audio interface, compatible with Dante and AES67; audio sample rate is 48 kHz with 24-bit sample size.
- Large signal to noise ratio, wide audio bandwidth and very low distortion and crosstalk.
- Digital signal processing on all amplifier channels, including equalization, limiting and delay, to optimize and tailor the sound in each loudspeaker zone.

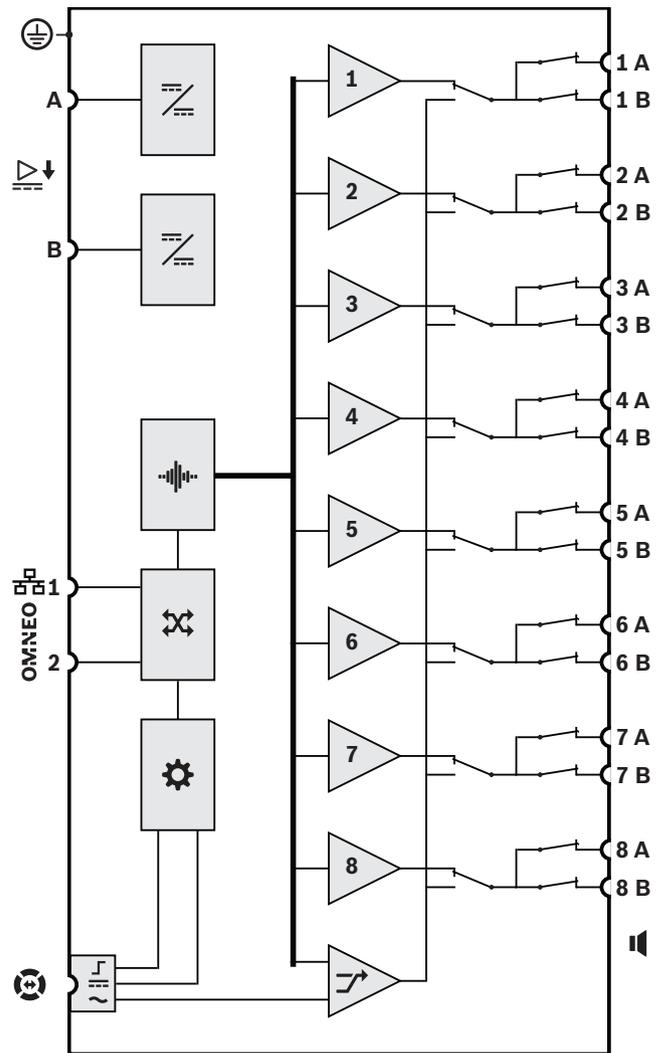
**Supervision**

- Supervision of amplifier operation and all of its connections; faults are reported to the system controller and logged.
- Loudspeaker line integrity supervision without interruption of audio, using end-of-line devices (separately available) for best reliability.
- Network link supervision.

**Fault tolerance**

- Dual OMNEO network connections, supporting Rapid Spanning Tree Protocol (RSTP), for loop-through connections to adjacent devices.
- Dual 48 VDC inputs with polarity reversal protection, each with a full power DC/DC converter, operating in tandem for redundancy.
- Fully independent amplifier channels; the integrated additional spare channel automatically replaces a failing channel, with due regard of the actual sound processing settings.
- All amplifier channels support two independent loudspeaker groups, A and B, enabling redundant loudspeaker wiring topologies.
- Backup analog audio lifeline input driving the spare amplifier channel to serve all connected loudspeaker zones in case both network connections, or the amplifier network interface, would fail.

**Connection and functional diagram**



	DC to DC converter		Audio processing (DSP)
	OMNEO network switch		Controller
	Lifeline control interface		Lifeline supply input
	Lifeline audio input	1-8	Amplifier channel
	Spare channel		

**Front view**



**Front panel indicators**

	Spare channel substitute 1-8	White
	Signal present 1-8	Green
	Fault present 1-8	Yellow
	Ground fault present	Yellow

	Device fault present	Yellow
	Audio lifeline substitute	White
	Network link to system controller present	Green
	Network link lost	Yellow
	Amplifier in standby mode	Blue
	Power on	Green

**Rear view**







**Rear panel indicators**

	100 Mbps network	Yellow
	1 Gbps network	Green
	Power on	Green
	Device in identification mode	Green blinking
	Device fault present	Yellow

**Rear panel controls**

	Device reset (to factory default)	Button
--	-----------------------------------	--------

**Rear panel connections**

	48 VDC input A-B	
	Lifeline interface	
	Loudspeaker output A-B (1-8)	
	Network port 1-2	
	Safety ground	

**Architects' and engineers' specifications**

The IP-networked 8-channel amplifier shall be designed exclusively for use with Dynacord PROMATRIX 9000 systems. The amplifier shall adapt the maximum output power of each amplifier channel to its connected loudspeaker load, with free assignable output power per channel for a total maximum of 600 watt per amplifier, supporting 70 V or 100 V operation with direct drive capability and outputs that are galvanically insulated from ground.

The amplifier shall have a built-in independent spare amplifier channel for automatic failover. The amplifier shall provide an interface for control data and multi-channel digital audio over OMNEO using dual Ethernet ports for redundant network connection, supporting RSTP and loop-through cabling, with automatic failover to an analog lifeline input. The amplifier shall have dual power supply inputs and power supplies. All amplifier channels shall have independent A/B zone outputs with support for class-A loudspeaker loops. All amplifier channels shall supervise the integrity of connected loudspeaker lines without interruption of audio distribution. The amplifier shall provide front-panel LED status indications for the network link, ground fault, power supplies and audio channels, and provide additional software monitoring and fault reporting features. The amplifier shall be rack mountable (1U) and feature software-configurable signal processing including level control, parametric equalization, limiting and delay for each channel. The amplifier shall be certified for EN 54-16, marked for CE and be compliant with the RoHS directive. Warranty shall be three years minimum. The amplifier shall be a Dynacord PM9-AD608.

**Regulatory information**

**Emergency standard certifications**

Europe	EN 54-16
Maritime applications	DNV GL Type Approval

**Emergency standard compliance**

Europe	EN 50849
--------	----------

**Regulatory areas**

Safety	EN 62368-1
Immunity	EN 55024 EN 55103-2 (E1, E2, E3) EN 50130-4
Emissions	EN 55032 EN 61000-6-3
Environment	EN 50581
Railway applications	EN 50121-4

**Installation/configuration notes**

This is a professional product that should be installed, used and maintained by trained professionals only.

**Parts included**

Quantity	Component
1	Amplifier, 600W 8-channel
1	Set of 19"-rack mounting brackets (pre-mounted)
1	Set of screw connectors and cables
1	Safety information

## Technical specifications

### Amplifier outputs

#### Nominal output voltage

100 V mode, 1 kHz, THD <1%, no load (VRMS) 100 VRMS

70 V mode, 1 kHz, THD <1%, no load (VRMS) 70 VRMS

#### Maximum output power\* / RMS power\*

All channels combined (100 V mode, load 16.7 Ω | 70 V mode, load 8.3 Ω)

Maximum output power (W) 600 W

RMS power (W) 150 W

Channel 1 (100 V mode, load 16.7 ohm // 20 nF)

Maximum output power (W) 600 W

RMS power (W) 150 W

Channel 1 (70 V mode, load 11.7 ohm // 20 nF)

Maximum output power (W) 420 W

RMS power (W) 105 W

Other channels (100 V mode, load 33.3 ohm // 20 nF | 70 V mode, load 16.7 ohm // 20 nF)

Maximum output power (W) 300 W

RMS power (W) 75 W

DC offset voltage (mV) < 50 mV

\*EIAJ test standard, 1 kHz, 8/40 ms

#### Signal processing per channel

Master EQ 7-band

Level control (dB) 0 dB – -60 dB, mute

Level control resolution (dB) 1 dB

Audio delay (s) 0 s – 60 s

Audio delay resolution (ms) 1 ms

RMS power limiter RMS power

#### Lifeline

Input sensitivity (dBV) (100 V out) 0 dBV

Mute attenuation (dB) > 80 dB

Minimum signal-to-noise ratio (dBA) > 90 dBA

#### Acoustic

Full to no load regulation (dB) (20 Hz to 20.000 Hz) < 0.2 dB

Frequency response (-3 dB) (Hz) (RMS power, +0.5) 20 Hz – 20,000 Hz

Total harmonic distortion + noise (%) (RMS power, 20 Hz to 20.000 Hz) < 0.50%

Total harmonic distortion + noise (%) (6 dB below RMS power, 20 Hz to 20.000 Hz) < 0.1%

Intermodulation distortion (19/20 kHz) (%) (6 dB below RMS power, 1:1) < 0.10%

Minimum signal-to-noise ratio (dBA) (100 V mode, 20 Hz to 20.000 Hz) 110 dBA

Minimum signal-to-noise ratio (dBA) (70 V mode, 20 Hz to 20.000 Hz) 107 dBA

Crosstalk between channels (dBA) (100 Hz to 20.000 Hz) < -84 dBA

### Electrical

#### Loudspeaker load

Loudspeaker load, both modes, all channels (maximum) 600 W

Minimum output load impedance (Ω), 100 V mode, all channels 16.70 Ω

Minimum output load impedance (Ω), 70 V mode, all channels 8.3 Ω

Maximum cable capacitance (nF), both modes, all channels 200 nF

<b>Power transfer</b>	TO DELETE
Power supply input A/B	TO DELETE
Input voltage (VDC)	48 VDC
Input voltage (VDC) (tolerance)	44 VDC – 60 VDC
Power consumption, 48 V	
Power consumption (W), sleep mode, no supervision	6 W
Power consumption (W), snooze mode, supervision active	8.9 W
Power consumption (W), active mode, idle	56 W
Power consumption (W), active mode, low power	77 W
Power consumption (W), active mode, RMS power	246 W
Power consumption (W), per active port	0.4 W
Heat loss, including power supply	TO DELETE
Maximum heat loss (BTU/h), active mode, idle	225 BTU/h
Maximum heat loss (kJ/h), active mode, idle	237 kJ/h
Maximum heat loss (BTU/h), active mode, low power	308 BTH/h
Maximum heat loss (kJ/h), active mode, low power	325 kJ/h
Maximum heat loss (BTU/h), active mode, full power	412 BTH/h
Maximum heat loss (kJ/h), active mode, full power	434 kJ/h

**Supervision**

End-of-line detection mode	Pilot tone supervision, 25.5 kHz, 3 VRMS
Power supply input A/B	Undervoltage
Ground short detection (loudspeaker lines)	< 50 kohm
Amplifier channel redundancy switching	Internal spare channel
Amplifier channel load	Short circuit
Loudspeaker line redundancy switching	A/B group, Class-A loop
Controller continuity	Watchdog
Temperature	Overheat
Fan	Rotation speed
Network interface	Link presence

**Network interface**

Ethernet type	100BASE-TX; 1000BASE-T
Ethernet protocol	TCP/IP
Redundancy	RSTP
Control/Audio protocol	OMNEO
Latency (ms) of the network audio	10 ms
Audio encryption	AES 128
Security	TLS
Number of Ethernet ports	2

**Reliability**

Mean time between failures (MTBF) (h) (calculated according to Telcordia SR-332 Issue 3)	250,000 h
--	-----------

**Environmental**

Operating temperature (°C)	-5 °C – 50 °C
Operating temperature (°F)	23 °F – 122 °F
Storage temperature (°C)	-30 °C – 70 °C
Storage temperature (°F)	-22 °F – 158 °F
Operating relative humidity, non-condensing (%)	5% – 95%
Air pressure (hPa)	560 hPa – 1,070 hPa
Installation altitude (m)	-500 m – 5,000 m
Installation altitude (ft)	1,640 ft – 16,404 ft
Operating vibration	
Amplitude (mm)	< 0.70 mm
Acceleration (G)	< 2 G
Bump (transport) (G)	< 10 G (IEC 60068-2-27)

**Represented by:**

Bosch Security Systems B.V.  
Torenallee 49  
5617 BA Eindhoven  
Netherlands  
www.dynacord.com

Fan airflow	Front to sides/rear
Fan noise, 1 m distance (dBSPLA), idle condition	< 30 dBSPLA
Fan noise, 1 m distance (dBSPLA), RMS power	< 53 dBSPLA

**Mechanical**

Dimensions (H x W x D) (mm)	44 mm x 483 mm x 400 mm
Rack unit (U)	1 U, 19 in
IP rating	IP30
Material	Steel; Zamac
Color (RAL)	RAL 9017 Traffic black
Weight (kg)	8.80 kg

**Ordering information****PM9-AD608 Amplifier, 600W 8-channel**

Network-connected, DC-powered, 8-channel, 600 W power amplifier with integrated spare channel (max. 600 W) and DSP functions.

Order number **PM9-AD608 | F.01U.351.325**