


Custom System Rack IPX 4ch system rack 4x1250/2500W



- 4-channel Dynacord IPX amplifier in road ready case with connector panel for fullrange, 2-way, 3-way or 4-way speaker systems
- 4 XLR inputs, 1 XLR through, ch 1-4 CatCore through (for shielded CAT5-7 cable)
- 4 NL-4 outputs, configured in pairs for biamped systems, 1 NL8 (ch 1-4)
- 2 Ethercon connectors for OMNEO (Dante/OCA) primary & secondary networks

only available in selected countries



Parts included

Quantity	Component
1	IPX 4-channel amplifier
1	PCO32A16-EU power cord
1	4U 19" touring rack, double door*
1	CP-IPX1-4 connector panel
1	1 U blank panel
1	IPX manual and safety instruction booklet

* example, other rack options available

Weight and dimensions

Dimensions* 585 x 238 x 758
(W x H x D), mm


Weight* 41,5 kg (92 lb)

Shipping weight* 43,5 kg (97 lb)


* with 4U double door touring rack with IPX5:4.
For technical specifications of IPX amplifiers please see EDS.

Application examples


Fullrange speakers, e.g. 4 channel stage monitoring

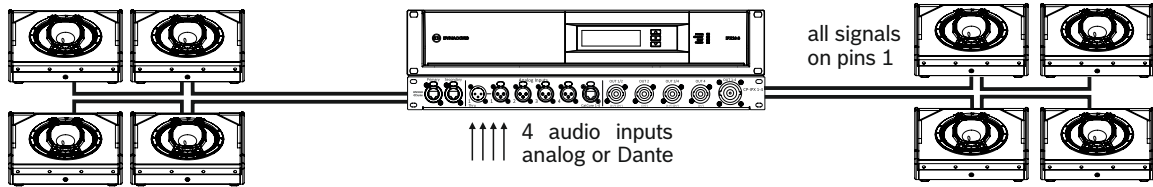

2-way stereo system

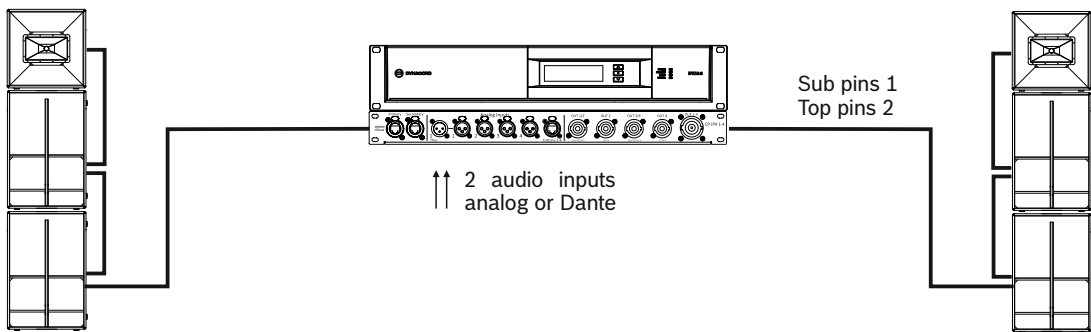


2-way stereo system

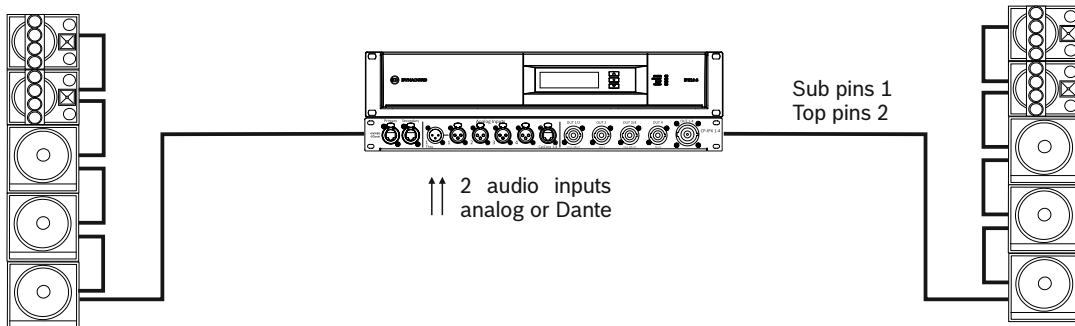

Schematics

CP-IPX1-4

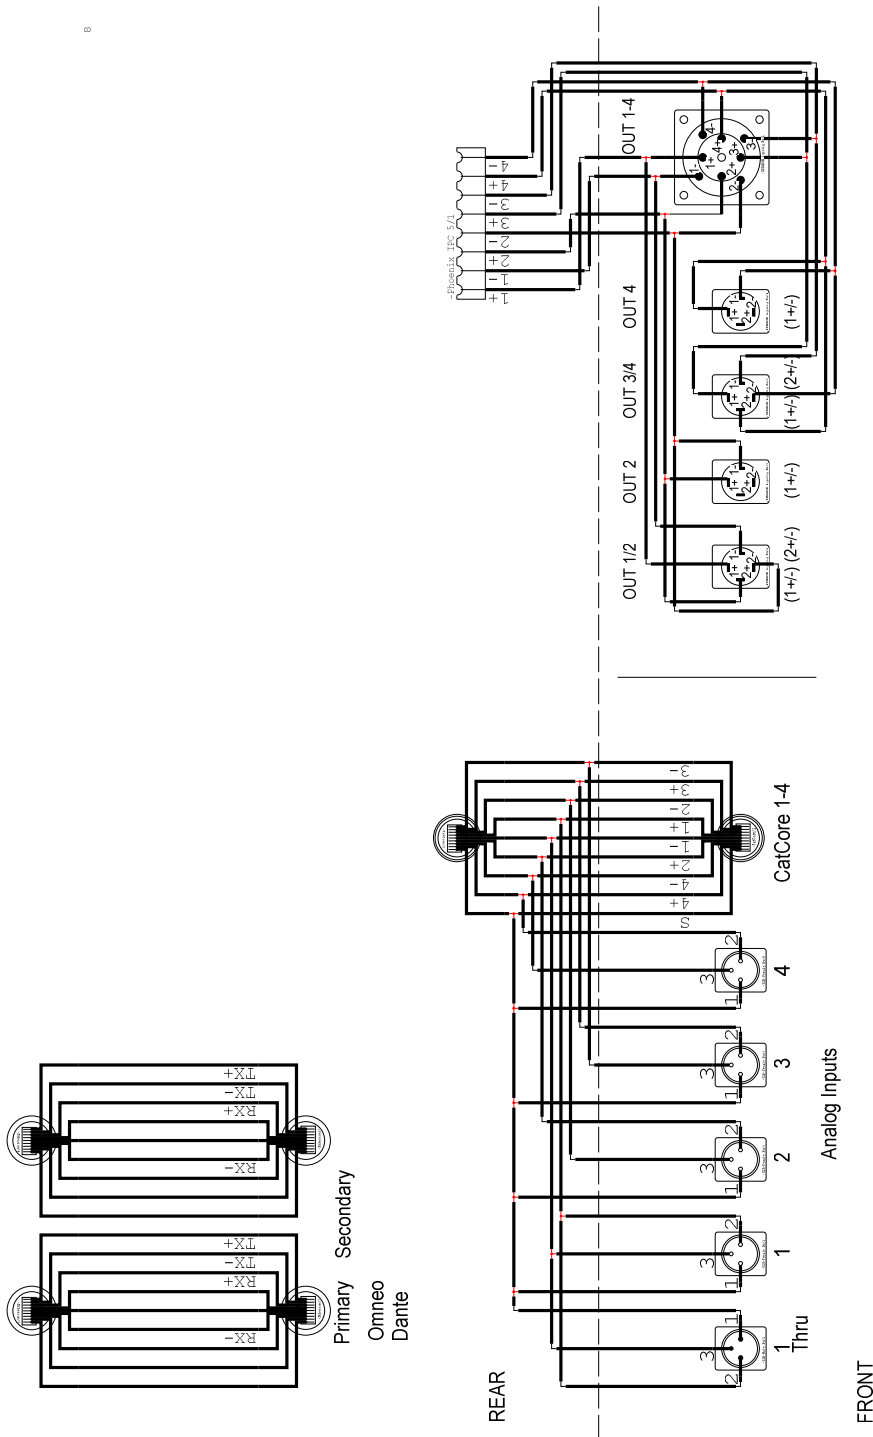

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany

Bosch Security Systems, LLC
 130 Perinton Parkway
 Fairport, NY 14450
 USA