


Custom System Rack

TGX-2 system rack 8x2500W/5000W



- 2 x 4-channel Dynacord TGX amplifier in 10U rack with connector panel for fullrange, 2-way, 3-way or 4-way speaker systems
- 2 x 4 XLR inputs (line or AES3), 2 XLR through
- 2 x 4 NL-4 outputs, configured in pairs for biamped systems, 2 NL8 (pins 1-4)
- 2 Ethercon connectors for OMNEO (Dante/OCA) primary & secondary networks
- Choice of TGX10: 4 x 2500 W/4Ohms or TGX20: 4 x 5000 W/4Ohms
- Optional: power distribution, network switch(es), blank panels

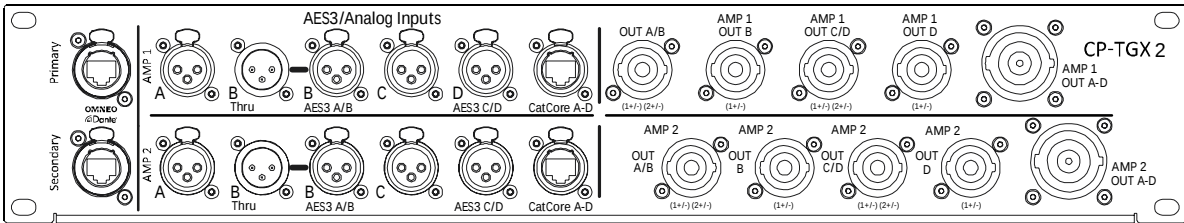

Parts included

Quantity	Component
2	TGX 4-channel amplifier
2	PCO32A16-EO power cord
1	10U 19" touring rack, double door*
1	AC232 power distribution 32A-6x16A*
1	CP-TGX2 connector panel
1	TGX manual and Safety instruction booklet

* example, other rack options available


Technical specifications

Dimensions* (W x H x D), mm	585 x 715 x 758
Weight* 2 TGX10	90,0 kg (200 lb)
Shipping weight* 2 TGX10	96,0 kg (212 lb)


* with 10U double door touring rack
For technical specifications of TGX10 or TGX20 amplifier please see EDS.

Application examples


2-way stereo plus 4 fullrange speakers

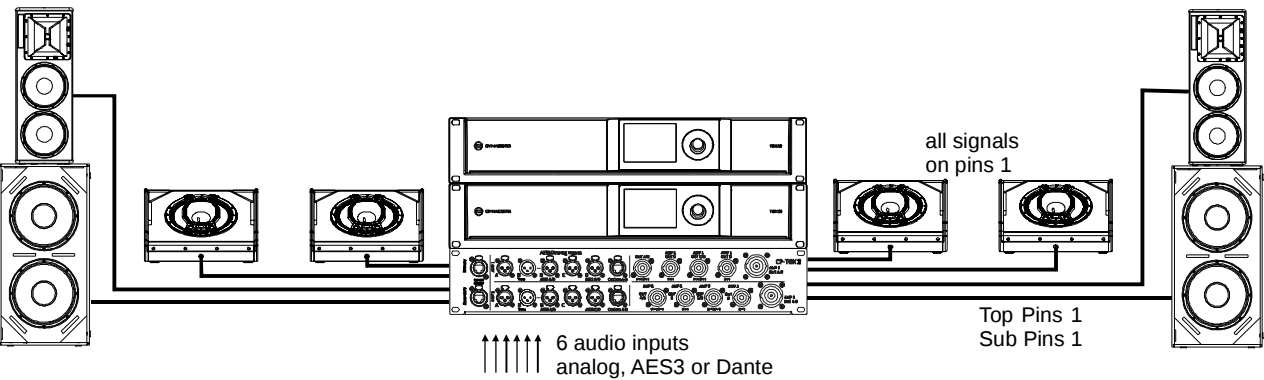


3-way system, stereo, dual sub

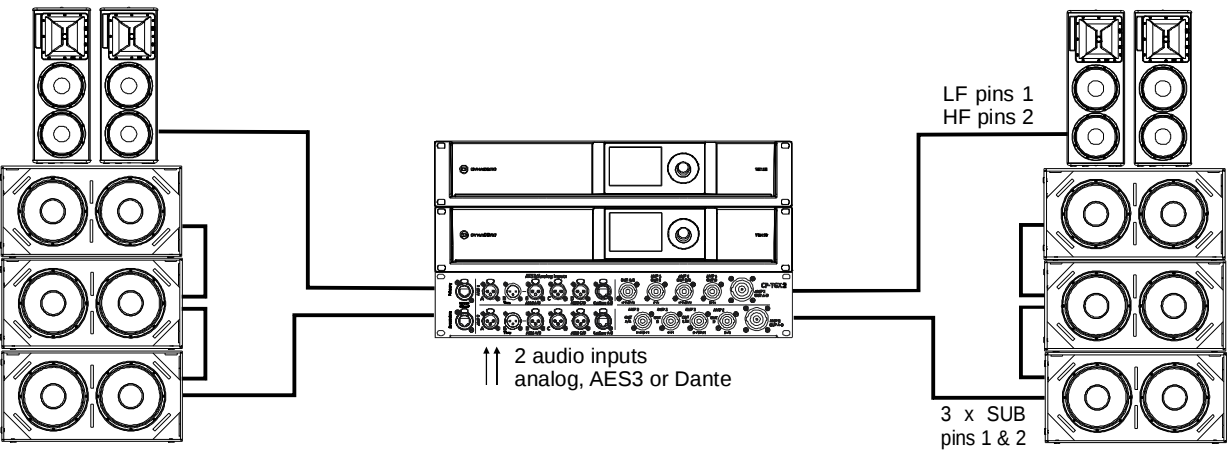

4-way system, stereo

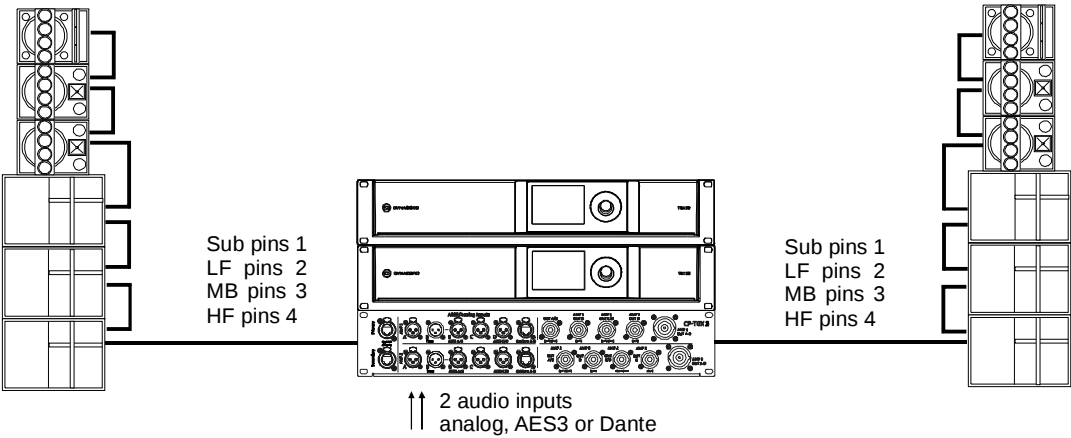

Schematics
CP-TGX2

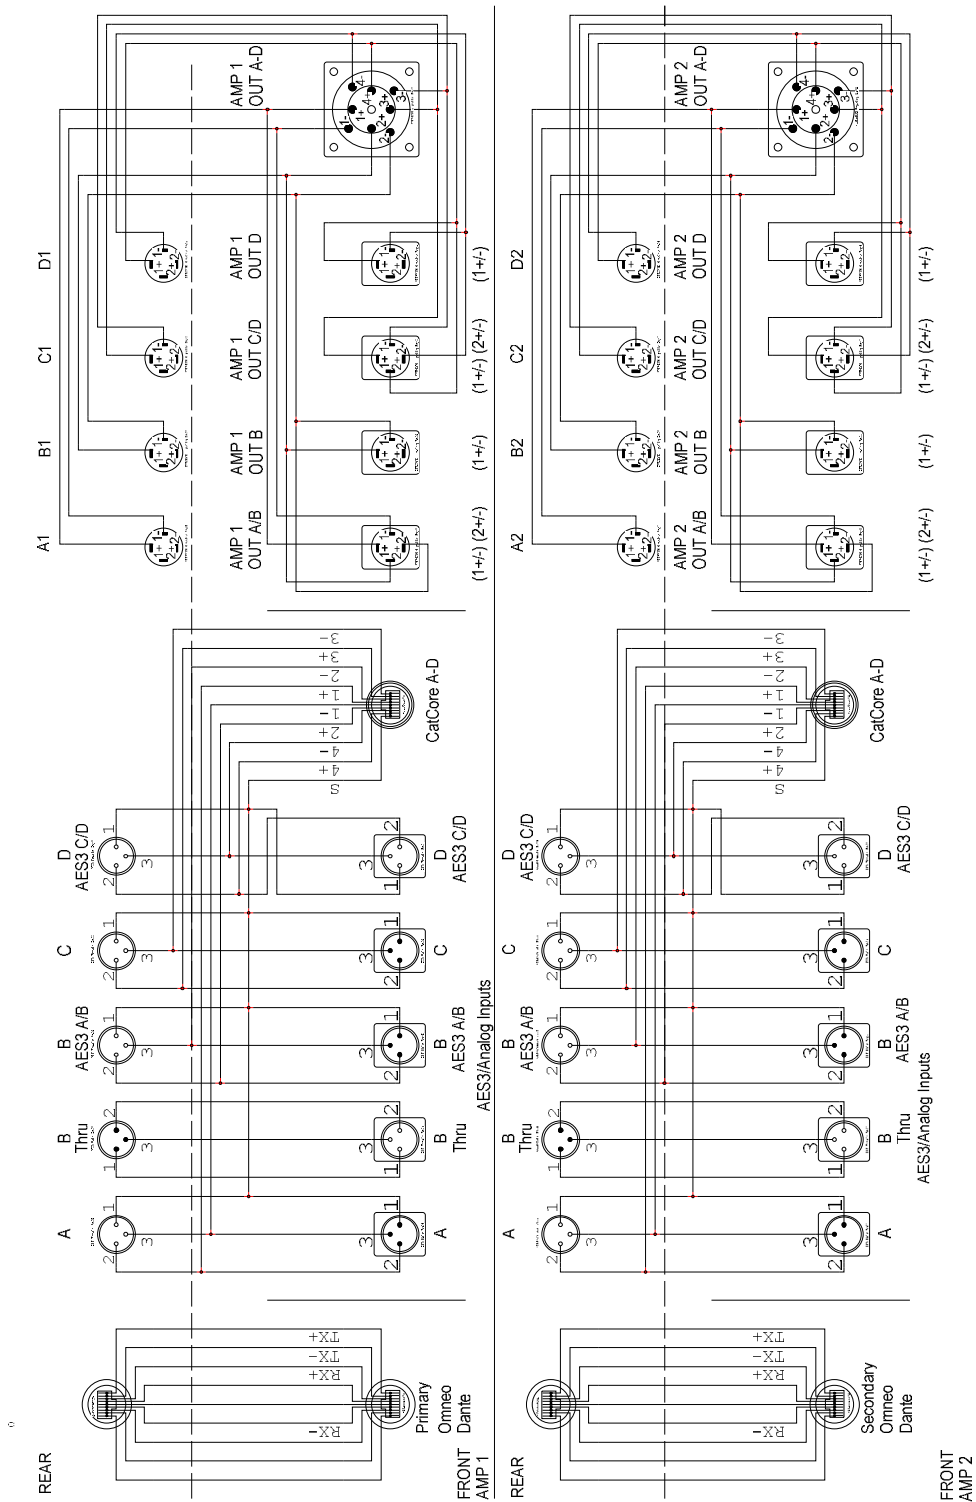

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450
USA