


# Custom System Rack TGX-3 system rack 12x2500W/5000W



- 3 x 4-channel Dynacord TGX amplifier in 10U rack with connector panel for fullrange, 2-way, 3-way or 4-way speaker systems
  - Amp 3: 4 XLR (line/AES3) inputs with 2 through, Amps 1&2 1 XLR (line/AES3) with through
  - 3 NL8, 2 with through, Amp 3 with 4 NL4
  - 2 Ethercon connectors for OMNEO (Dante/OCA)
  - Choice of TGX10: 4 x 2500 W/4Ohms or
  - TGX20: 4 x 5000 W/4Ohms
- Optional: power distribution, network switch(es), blank panels  
only available in selected countries

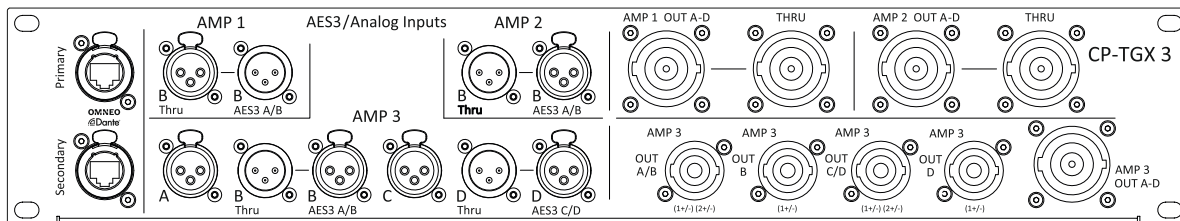

## Parts included

Quantity	Component
3	TGX 4-channel amplifier
3	PCO32A16-EO power cord
1	10U 19" touring rack, double door*
1	AC232 power distribution 32A-6x16A*
1	CP-TG3 connector panel
1	TPX manual and Safety instruction booklet

\* example, other rack options available


## Technical specifications

Dimensions* (W x H x D), mm	585 x 715 x 758
Weight* 3 TGX10	105,0 kg (232 lb)
Shipping weight* 3 TGX10	111,0 kg (246 lb)


\* with 10U double door touring rack  
For technical specifications of TGX10 or TGX20 amplifier please see EDS.

## Application examples

### 4-way stereo and 2 monitor/fill mixes

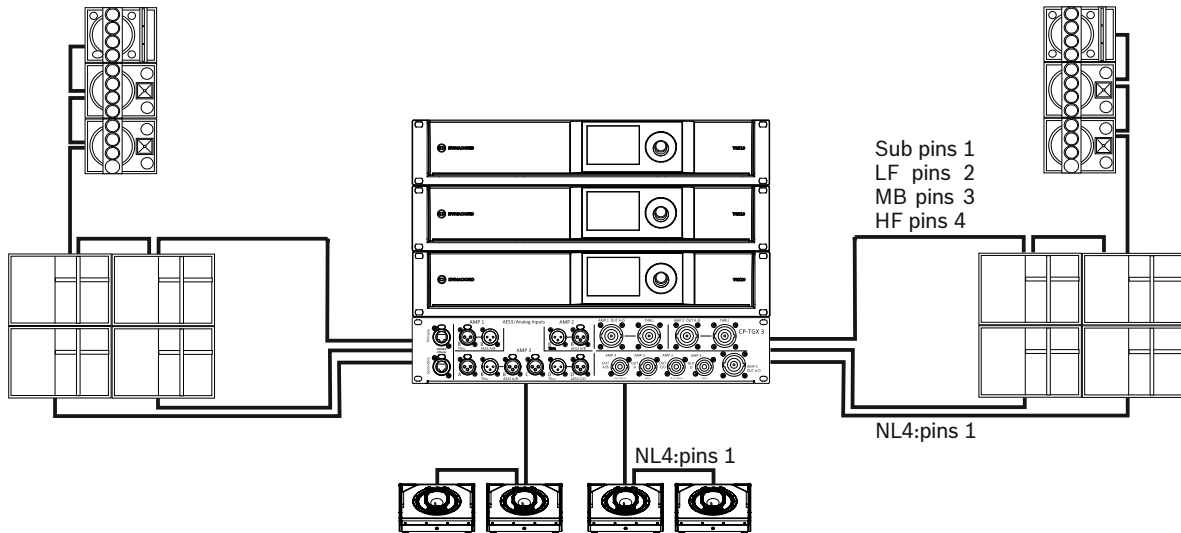


### 4-way system, 2 drive channels, cardioid sub, fills

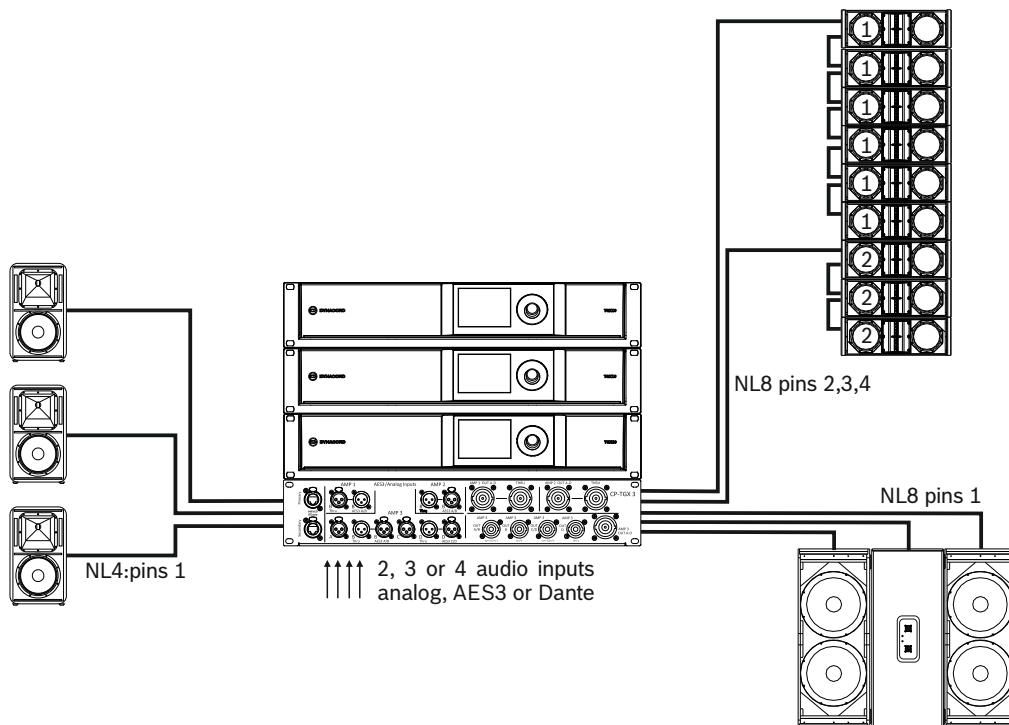

# Schematics

## CP-TGX3

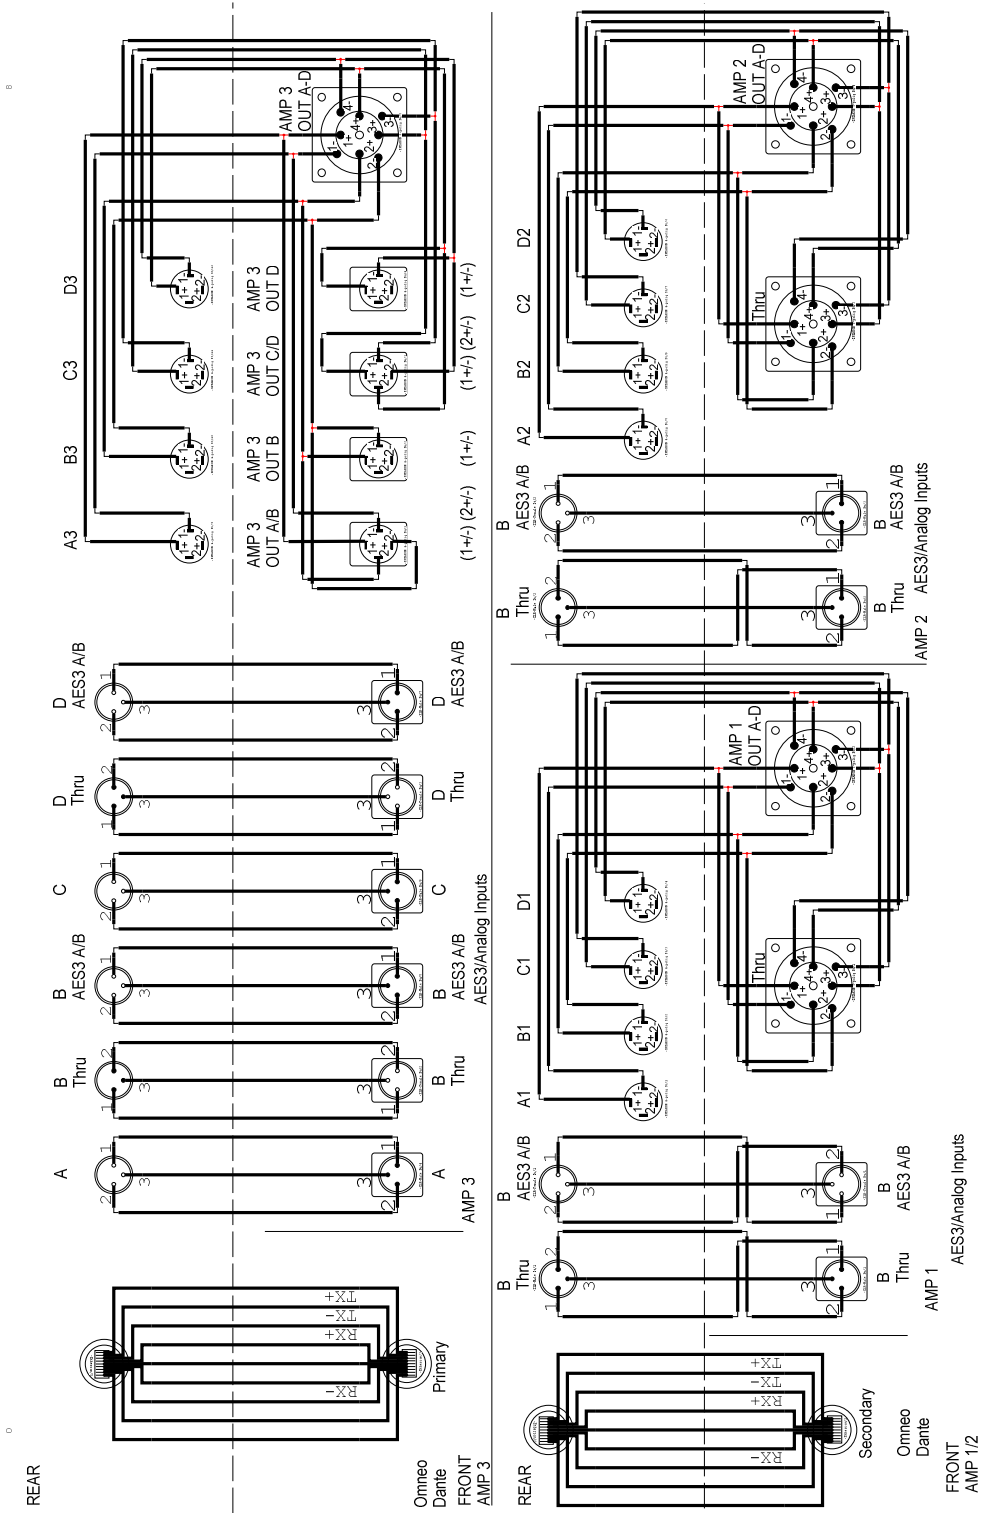

**Germany:**  
 Bosch Sicherheitssysteme GmbH  
 Robert-Bosch-Ring 5  
 85630 Grasbrunn  
 Germany

Bosch Security Systems, LLC  
 130 Perinton Parkway  
 Fairport, NY 14450  
 USA